
**Gaseous fire-extinguishing systems —
Physical properties and system
design —**

**Part 11:
HFC 236fa extinguishant**

*Systèmes d'extinction d'incendie utilisant des agents gazeux —
Propriétés physiques et conception des systèmes —*

Partie 11: Agent extincteur HFC 236fa



COPYRIGHT PROTECTED DOCUMENT

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

	Page
Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Characteristics and uses	1
4.1 General	1
4.2 Use of HFC 236fa systems	2
5 Safety of personnel	5
6 System design	6
6.1 Fill density	6
6.2 Superpressurization	7
6.3 Extinguishant quantity	7
7 Environmental properties	8

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

The committee responsible for this document is ISO/TC 21, *Equipment for fire protection and fire fighting*, Subcommittee SC 8, *Gaseous media and fire fighting systems using gas*.

This third edition cancels and replaces the second edition (ISO 14520-11:2005), which has been technically revised with the following changes:

- in [Table 5](#), minimum design data was corrected from previous edition; all but values for ethanol and methanol were incorrect;
- added [Clause 7](#).

A list of all parts in the ISO 14520 series can be found on the ISO website.

Gaseous fire-extinguishing systems — Physical properties and system design —

Part 11: HFC 236fa extinguishant

1 Scope

This document contains specific requirements for gaseous fire-extinguishing systems, with respect to the HFC 236fa extinguishant. It includes details of physical properties, specification, usage and safety aspects.

This document covers systems operating at nominal pressures of 25 bar and 42 bar superpressurized with nitrogen. This does not preclude the use of other systems.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 14520-1:2015, *Gaseous fire-extinguishing systems — Physical properties and system design — Part 1: General requirements*.

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 14520-1 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

4 Characteristics and uses

4.1 General

Extinguishant HFC 236fa shall comply with the specification shown in Table 1.

HFC 236fa is a colourless, almost odourless, electrically non-conductive gas with a density approximately five times that of air.

The physical properties are shown in Table 2.

HFC 236fa extinguishes fires mainly by physical means, but also by some chemical means.

Table 1 — Specification for HFC 236fa

Property	Requirement
Purity	99,6% by mass, min.
Acidity	3×10^{-6} by mass, max.
Water content	10×10^{-6} by mass, max.
Non-volatile residue	0,01 % by mass, max.
Suspended matter or sediment	None visible

Table 2 — Physical properties of HFC 236fa

Property	Units	Value
Molecular mass	—	152
Boiling point at 1,013 bar (absolute)	°C	-1,4
Freezing point	°C	-103
Critical temperature	°C	124,9
Critical pressure	bar abs	32,00
Critical volume	cm ³ /mol	274,0
Critical density	kg/m ³	551,3
Vapour pressure 20 °C	bar abs	2,296
Liquid density 20 °C	kg/m ³	1 377
Saturated vapour density 20 °C	kg/m ³	15,58
Specific volume of superheated vapour at 1,013 bar and 20 °C	m ³ /kg	0,1529
Chemical formula	CF ₃ CH ₂ CF ₃	
Chemical name	Hexafluoropropane	

4.2 Use of HFC 236fa systems

HFC 236fa total flooding systems may be used for extinguishing fires of all classes within the limits specified in ISO 14520-1:2015, Clause 4.

The extinguishant requirements per volume of protected space are shown in [Table 3](#) for various levels of concentration. These are based on methods shown in ISO 14520-1:2015, 7.6.

The extinguishing concentrations and design concentrations for various types of hazard are shown in [Table 4](#). Concentrations for other fuels are shown in [Table 5](#).

Table 3 — HFC 236fa total flooding quantity

Temperature <i>T</i> °C	Specific vapour volume <i>S</i> m ³ /kg	HFC 236fa mass requirements per unit volume of protected space, <i>m/V</i> (kg/m ³)										
		Design concentration (by volume)										
		5 %	6 %	7 %	8 %	9 %	10 %	11 %	12 %	13 %	14 %	15 %
0	0,141 3	0,372 5	0,451 7	0,532 7	0,615 4	0,699 9	0,786 3	0,874 7	0,965 1	1,057 5	1,152 1	1,248 9
5	0,144 2	0,365 0	0,442 7	0,522 0	0,603 1	0,686 0	0,770 6	0,857 2	0,945 8	1,036 4	1,129 1	1,224 0
10	0,147 1	0,357 9	0,434 0	0,511 8	0,591 3	0,672 5	0,755 5	0,840 4	0,927 3	1,016 1	1,107 0	1,200 0
15	0,149 9	0,351 0	0,425 7	0,502 0	0,579 9	0,659 6	0,741 0	0,824 3	0,909 5	0,996 6	1,085 7	1,176 9
20	0,152 8	0,344 4	0,417 7	0,492 5	0,569 0	0,647 2	0,727 1	0,808 8	0,892 3	0,977 8	1,065 2	1,154 8
25	0,155 7	0,338 0	0,410 0	0,483 4	0,558 5	0,635 2	0,713 6	0,793 8	0,875 8	0,959 7	1,045 5	1,133 4
30	0,158 6	0,331 9	0,402 5	0,474 6	0,548 3	0,623 7	0,700 7	0,779 4	0,859 9	0,942 3	1,026 6	1,112 8
35	0,161 5	0,326 0	0,395 3	0,466 2	0,538 6	0,612 5	0,688 2	0,765 5	0,844 6	0,925 5	1,008 2	1,093 0
40	0,164 3	0,320 3	0,388 4	0,458 0	0,529 1	0,601 8	0,676 1	0,752 1	0,829 8	0,909 2	0,990 6	1,073 8
45	0,167 2	0,314 7	0,381 7	0,450 1	0,520 0	0,591 4	0,664 5	0,739 1	0,815 5	0,893 6	0,973 5	1,055 3
50	0,170 1	0,309 4	0,375 2	0,442 5	0,511 2	0,581 4	0,653 2	0,726 6	0,801 7	0,878 5	0,957 0	1,037 5
55	0,173 0	0,304 3	0,369 0	0,435 1	0,502 7	0,571 7	0,642 3	0,714 5	0,788 3	0,863 8	0,941 1	1,020 2
60	0,175 9	0,299 3	0,363 0	0,428 0	0,494 5	0,562 4	0,631 8	0,702 8	0,775 4	0,849 7	0,925 7	1,003 5

This information refers only to the product HFC-236fa and may not represent any other products containing 1,1,1,3,3,3-hexafluoropropane as a component.

Symbols:

m/V is the agent mass requirements (kg/m³); i.e. mass, *m*, in kilograms of agent required per cubic metre of protected volume, *V*, to produce the indicated concentration at the temperature specified;

V is the net volume of hazard (m³); i.e the enclosed volume minus the fixed structures impervious to extinguishant

$$m = \left(\frac{c}{100 - c} \right) \frac{V}{S}$$

T is the temperature (°C); i.e. the design temperature in the hazard area;

S is the specific volume (m³/kg); the specific volume of superheated HFC 236fa vapour at a pressure of 1,013 bar may be approximated by the formula

$$S = k_1 + k_2 T$$

where

$$k_1 = 0,141 3$$

$$k_2 = 0,000 6$$

c is the concentration (%); i.e. the volumetric concentration of HFC 236fa in air at the temperature indicated and a pressure of 1,013 bar absolute.

Table 3 (continued)

Temperature <i>T</i> °C	Specific vapour volume <i>S</i> m ³ /kg	HFC 236fa mass requirements per unit volume of protected space, <i>m/V</i> (kg/m ³)										
		Design concentration (by volume)										
		5 %	6 %	7 %	8 %	9 %	10 %	11 %	12 %	13 %	14 %	15 %
65	0,178 7	0,294 5	0,357 1	0,421 1	0,486 5	0,553 3	0,621 6	0,691 5	0,762 9	0,836 0	0,910 8	0,987 3
70	0,181 6	0,289 8	0,351 4	0,414 4	0,478 8	0,544 5	0,611 8	0,680 5	0,750 8	0,822 7	0,896 3	0,971 6
75	0,184 5	0,285 3	0,346 0	0,408 0	0,471 3	0,536 0	0,602 2	0,669 9	0,739 1	0,809 9	0,882 3	0,956 5
80	0,187 4	0,2809	0,340 6	0,401 7	0,464 1	0,527 8	0,593 0	0,659 6	0,727 7	0,797 4	0,868 8	0,941 8
85	0,190 3	0,276 6	0,335 5	0,395 6	0,457 0	0,519 8	0,584 0	0,649 6	0,716 7	0,785 4	0,855 6	0,927 5
90	0,193 1	0,272 5	0,330 5	0,389 7	0,450 2	0,512 1	0,575 3	0,639 9	0,706 0	0,773 7	0,842 9	0,913 7
95	0,196 0	0,268 5	0,325 6	0,384 0	0,443 6	0,504 5	0,566 8	0,630 5	0,695 7	0,762 3	0,830 5	0,900 3

This information refers only to the product HFC-236fa and may not represent any other products containing 1,1,1,3,3,3-hexafluoropropane as a component.

Symbols:

m/V is the agent mass requirements (kg/m³); i.e. mass, *m*, in kilograms of agent required per cubic metre of protected volume, *V*, to produce the indicated concentration at the temperature specified;

V is the net volume of hazard (m³); i.e. the enclosed volume minus the fixed structures impervious to extinguishant

$$m = \left(\frac{c}{100 - c} \right) \frac{V}{S}$$

T is the temperature (°C); i.e. the design temperature in the hazard area;

S is the specific volume (m³/kg); the specific volume of superheated HFC 236fa vapour at a pressure of 1,013 bar may be approximated by the formula

$$S = k_1 + k_2 T$$

where

$$k_1 = 0,141 3$$

$$k_2 = 0,000 6$$

c is the concentration (%); i.e. the volumetric concentration of HFC 236fa in air at the temperature indicated and a pressure of 1,013 bar absolute.

Table 4 — HFC 236fa reference extinguishing and design concentrations

Fuel	Extinguishment % by volume	Minimum design % by volume
Class B		
Heptane (cup burner)	6,5	9,8
Heptane (room test)	7,5	
Surface class A		
Wood Crib	5,0	8,8
PMMA	6,8	
PP	6,8	
ABS	6,8	
Higher Hazard Class A	See Note 4	9,3
NOTE 1 The extinguishment values for the Class B and the Surface Class A fuels are determined by testing in accordance with ISO 14520-1:2015, Annexes B and C.		
NOTE 2 The minimum design concentration for the Class B fuel is the higher value of the heptane cup burner or room test heptane extinguishment concentration multiplied by 1,3.		
NOTE 3 The minimum design concentration for Surface Class A fuel is the highest value of the wood crib, PMMA, PP or ABS extinguishment concentrations multiplied by 1,3. In the absence of any of the four extinguishment values, the minimum design concentration for Surface Class A is that of Higher Hazard Class A.		
NOTE 4 The minimum design concentration for Higher Hazard Class A fuels is the higher of the Surface Class A or 95 % of the Class B minimum design concentration.		
NOTE 5 See ISO 14520-1:2015, 7.5.1.3 for guidance on Class A fuels.		

In [Table 4](#), the extinguishing and design concentrations for room-scale test fires are for informational purposes only. Lower and higher extinguishing concentrations than those shown for room-scale test fires may be achieved and allowed when validated by test reports from internationally recognized laboratories.

Table 5 — HFC 236fa extinguishing and design concentrations for other fuels

Fuel	Extinguishment % by volume	Minimum design % by volume
Acetone	6,7	8,7
Ethanol	7,8	10,1
Ethyl acetate	6,8	8,8
Kerosene	6,5	8,5
Methanol	8,4	10,9
Propane	7,2	9,4
Toluene	6,5	8,5
NOTE 1 Extinguishing concentrations for all Class B fuels listed were derived in accordance with ISO 14520-1:2015, Annex B.		
NOTE 2 Minimum design values have been increased to the minimum design concentration established for heptane in accordance with ISO 14520-1:2015, 7.5.1.		

5 Safety of personnel

Any hazard to personnel created by the discharge of HFC 236fa shall be considered in the design of the system.

Potential hazards can arise from the following:

- a) the extinguishant itself;

- b) the combustion products of the fire;
- c) breakdown products of the extinguishant resulting from exposure to fire.

For minimum safety requirements, see ISO 14520-1:2015, Clause 5.

Toxicological information for HFC 236fa is shown in [Table 6](#).

Table 6 — Toxicological information for HFC 236fa

Property	Value % by volume
ALC	>47,5
No observed adverse effect level (NOAEL)	10
Lowest observed adverse effect level (LOAEL)	15
NOTE ALC is the approximate lethal concentration for a rat population during a 4-h exposure.	

6 System design

6.1 Fill density

The fill density of the container shall not result in pressures exceeding container specifications at the maximum design temperature. For an example, see [Table 7](#).

Exceeding the maximum fill density may result in the container becoming “liquid full”, with the effect that an extremely high rise in pressure occurs with small increases in temperature, which could adversely affect the integrity of the container assembly.

The relationships between pressure and temperature are shown in [Figure 1](#) for various levels of fill density.

Table 7 — 25 bar storage container characteristics for HFC 236fa

Property	Unit	Value
Maximum fill density	kg/m ³	1 202
Maximum container working pressure at 50 °C	bar	34
Superpressurization at 22 °C	bar	25
NOTE Reference should be made to Figure 1 for further data on pressure/temperature relationships.		

Table 8 — 42 bar storage container characteristics for HFC-236fa

Property	Unit	Value
Maximum fill density	kg/m ³	1 202
Maximum container working pressure at 50 °C	bar	79
Superpressurization at 22 °C	bar	42
NOTE Reference should be made to Figure 2 for further data on pressure/temperature relationships.		

6.2 Superpressurization


Containers shall be superpressurized with nitrogen with a moisture content of not more than 60×10^{-6} by mass to an equilibrium pressure of 25 bar $^{+5}_0$ % or 42 bar $^{+5}_0$ % at a temperature of 22 °C (see [Clause 1](#) for exception).

6.3 Extinguishant quantity

The quantity of extinguishant shall be the minimum required to achieve the design concentration within the hazard volume at the minimum expected temperature, determined using [Table 3](#) and the method specified in ISO 14520-1:2015; 7.6.

The design concentrations shall be that specified for relevant hazards shown in [Table 4](#). This includes a 1,3 safety factor on the extinguishing concentration.

Consideration should be given to increasing this for particular hazards and seeking advice from the relevant authority.

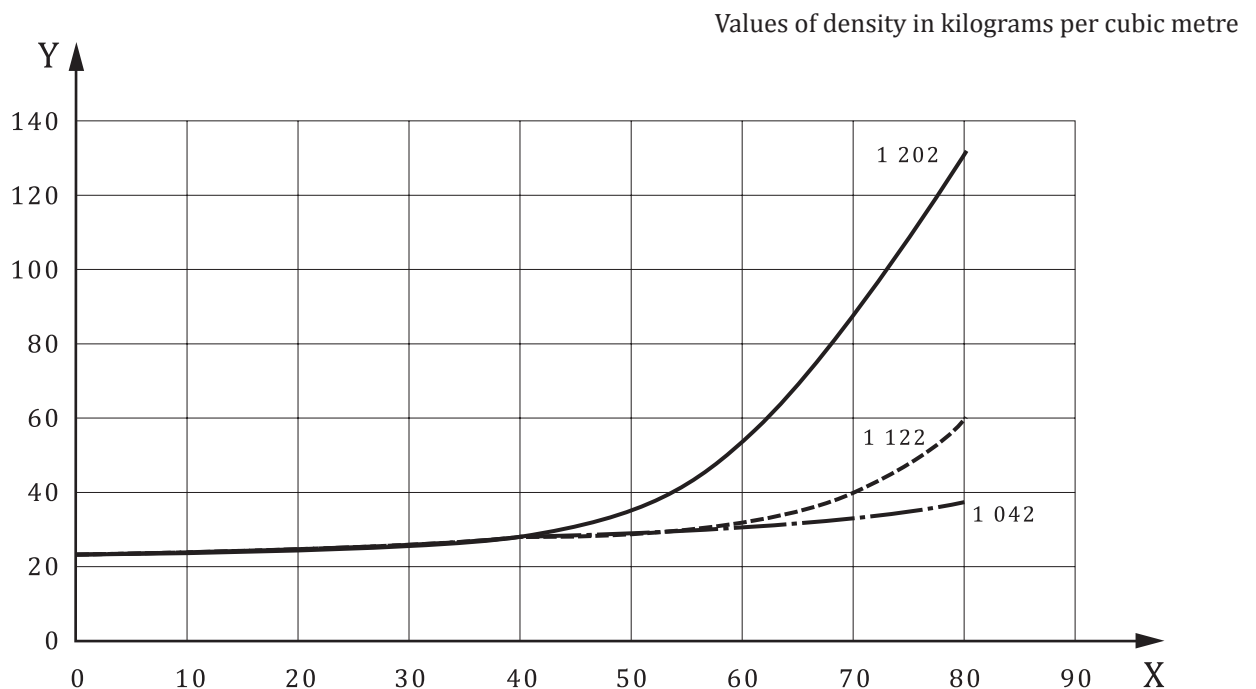


Key

X temperature, °C

Y pressure, bar

Figure 1 — Temperature/pressure graph for HFC 236fa pressurized with nitrogen to 25 bar at 22 °C

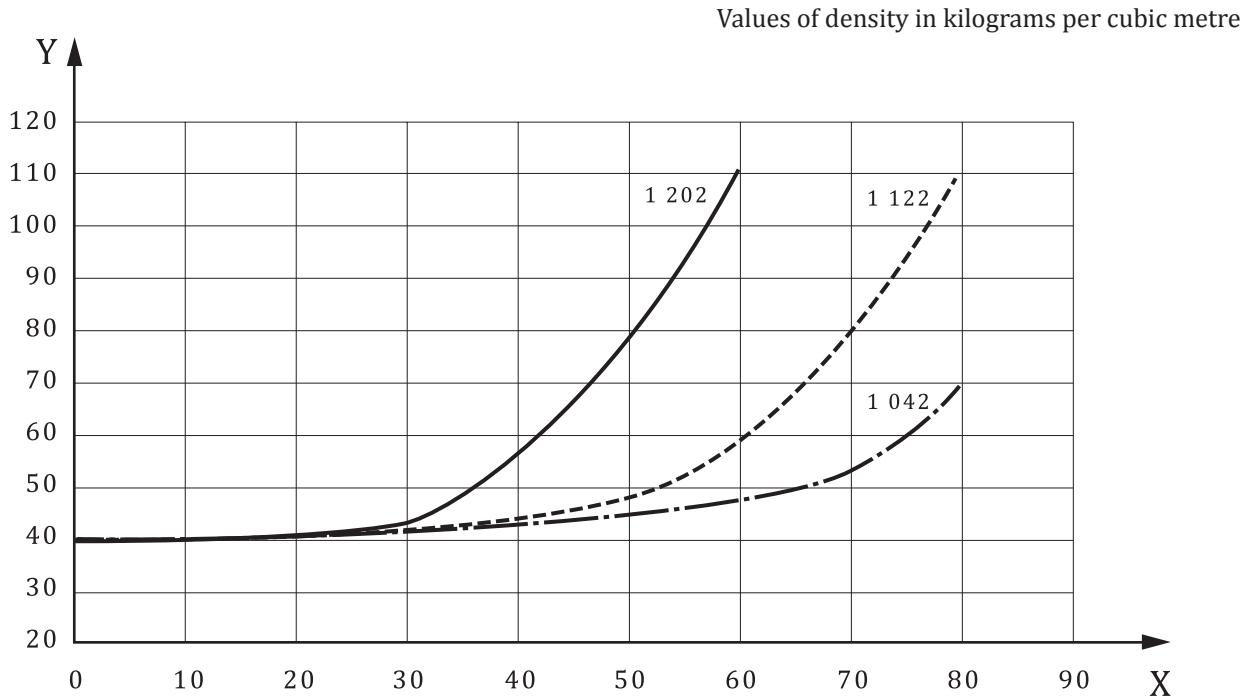

Key

X temperature, °C
 Y pressure, bar

Figure 2 — Temperature/pressure graph for HFC 236fa pressurized with nitrogen to 42 bar at 22 °C

7 Environmental properties

For information purposes, environmental properties of HFC 236fa extinguishant are provided:

GWP (100 years)	9810
ODP	0 ¹⁾

NOTE 1 See ISO 14520-1:2015, 4.2.1 for a discussion of GWP values and their relation to the impact of a gas on climate change/global warming.

NOTE 2 Environmental properties derived from the following:

- 2005 IPCC/TEAP Special Report Safeguarding the Ozone Layer and the Global Climate System: Issues Related to Hydrofluorocarbons and Perfluorocarbons;
- 2007 Fourth Assessment Report of the Intergovernmental Panel on Climate Change;
- U.S. EPA.

1) Extinguishant HFC 236fa has zero ODP because it contains no chlorine, bromine, or iodine, the primary kinetically active species for ozone depletion.

**Textiles — Determination of dimensional
change in washing and drying**

*Textiles — Détermination des variations dimensionnelles au lavage et au
séchage domestiques*



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

© ISO 2007

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 5077 was prepared by Technical Committee ISO/TC 38, *Textiles*, Subcommittee SC 2, *Cleansing, finishing and water resistance tests*.

This second edition cancels and replaces the first edition (ISO 5077:1984), which has been technically revised.

Textiles — Determination of dimensional change in washing and drying

1 Scope

This International Standard specifies a method for the determination of the dimensional change of fabrics, garments or other textile articles when subjected to an appropriate combination of specified washing and drying procedures.

In the case of textile articles or deformable materials, it is necessary to exercise all possible caution in the interpretation of the results.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 139, *Textiles — Standard atmospheres for conditioning and testing*

ISO 3759, *Textiles — Preparation, marking and measuring of fabric specimens and garments in tests for determination of dimensional change*

ISO 6330, *Textiles — Domestic washing and drying procedures for textile testing*

3 Principle

The specimen is conditioned in the specified standard atmosphere and measured before subjection to the appropriate washing and drying procedures. After drying, conditioning and remeasuring of the specimen, the changes in dimensions are calculated.

4 Apparatus and reagents

Use apparatus and reagents as specified in ISO 3759 and ISO 6330.

5 Atmospheric conditions

The atmospheric conditions required for conditioning and testing are specified in ISO 139.

6 Test specimens

6.1 The selection, dimensions, marking and measuring of test specimens are specified in ISO 3759.

6.2 When possible, three specimens from each sample should be used. One or two specimens may be used when insufficient sample is available.

7 Procedure

7.1 Determine the original length and width dimensions, as appropriate, after the specimens have been conditioned and measured according to the procedure specified in ISO 139 and ISO 3759.

7.2 Wash and dry the specimens according to one of the procedures specified in ISO 6330, as agreed between the interested parties.

7.3 After washing and drying, condition and measure the specimens and calculate the dimensional change of the specimens according to the procedure specified in ISO 3759.

8 Expression of results

8.1 Calculate the mean changes in dimensions in both the length and width directions in accordance with the arrangement in ISO 3759 as follows:

$$\frac{x_t - x_o}{x_o} \times 100$$

where

x_o is the original dimension;

x_t is the dimension measured after treatment.

Record the changes in measurement separately as a percentage of the corresponding original value.

8.2 Express the average dimensional changes to the nearest 0,5 %.

8.3 State whether the dimension has decreased (shrinkage) by means of a minus sign (–) or increased (extension) by means of a plus sign (+).

9 Test report

The test report shall specify the following:

- a) the number and year of this International Standard;
- b) the number of specimens washed and dried;
- c) the procedure used for washing and drying from ISO 6330;
- d) for fabric specimens, the average dimensional change in the length (warp or wale) and the average dimensional change in the width (weft or course) to the nearest 0,5 %;
- e) for garments, the description, make and size of the garment tested;
- f) for garments, an adequate description of each measuring position and the average dimensional change to the nearest 0,5 % at each position for each garment tested.